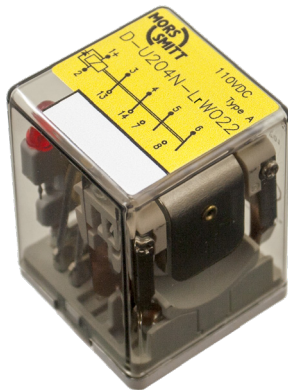


/// Instantaneous railway relay with 4 contacts

Rugged plug-in relays for extreme reliability, within long endurance applications and harsh environments

D-U200N-W

Instantaneous relay, weld-no-transfer
Part of D-platform



Description

The D-U200N-W is the improved version of the famous D-U200-W 4-pole instantaneous safety critical relay.

The dimensions, pinning and specifications are identical but it is much more reliable switching very low currents (1 mA @ 5 VDC). It is therefore the perfect relay to switch mixed loads.

Weld-no-transfer contacts are standard. The built-in magnetic arc blow-out ensures adequate DC breaking capacity resulting in long contact life and the now integrated contact separation prevents cross pollution of contacts better.

The operating temperature range is now -50 to + 85 Celsius. The IP40 dust ingress protection offers adequate protection allowing the relay to “breathe” ensuring long life whilst switching higher DC and inductive loads. The back EMF coil protection diode comes standard with the D-U200N-W series. The information on the relay cover is extended with serial no. and data matrix code for ease of traceability.

The mechanical design and construction of the D-U200N-W relay is so rugged that it is fit to last in salt laden atmospheres, low and high temperatures, very dry and very high humidity, shock and vibrations and high altitudes.

Several operators use this relay since the 1970’s and without a single incident. Indeed proven reliable and designed to survive train life!

The ultra-compact design, light weight, many options and the wide choice of sockets makes this the most flexible solution and preferred choice of many customers.

Features

- Ultra compact safety critical relay
- 4 Weld-no-transfer contacts, self-cleaning
- Integrated back EMF suppression diode
- Magnetic arc blow-out ensuring long contact life
- Minimum switching current 1 mA
- Maximum continuous current 10 A
- Proven reliable
- Wide temperature range -50 °C...+85 °C
- Mechanical life > 50 million operations
- Electrical life e.g. > 10 million operations at 0.5 A, 24 VDC
- Data matrix with serial number for traceability
- Integrated snaplock, no external retaining clip needed
- Transparent cover for visual inspection
- Red or green LED optional
- Many options and sockets available

Application

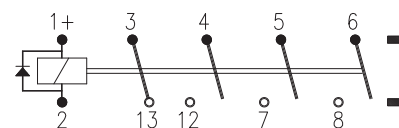
Relays keep on playing a vital role in reliable train operation. A key function is galvanic isolation between control (computers/ PLC’s) and power circuits providing isolation between systems, contact multiplication and amplification.

Other unique features are predictable failure behavior (Fail Safe) making system safety validation a lot more simple than using computer based solutions like PLC’s, long term availability = no obsolescence and easy maintenance by plug-in feature and transparent cover. Unlike more sensitive electronics relays are insensitive to EMI.

Using these features one can build a hardwired, fail safe control system which is cyber security safe and insensitive to electro magnetic disturbances and surges! Relays are ideal to use in trains for signal transfer/repeat, safety interlocking functions (brake - doors), load on-off switching and sub-system isolation.

Connection diagram

6 different contact combinations possible (see page 3)



D-U200N-W013 relay
 contact combination
 1 N/C 3 N/O

Railway compliancy

| | |
|---------------------|---------------------|
| EN 50155: 2017 | EN 50121-3-2: 2016 |
| IEC 60571: 2012 | EN 45545-2: 2015 |
| IEC 60077-1: 2017 | NF F16-101/102 |
| IEC 60947-5-1: 2016 | IEC 60947-5-4: 2002 |
| IEC 61373: 2010 | |



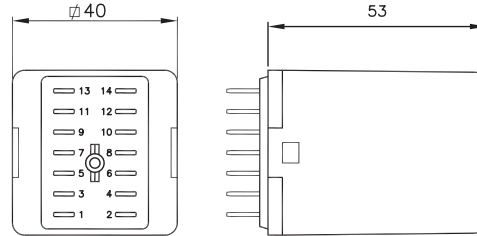
Instantaneous relay D-U200N-W

Options

- IP50 dust protection
- Red or green LED coil indicator
- Bipolar LED indicator
- 4 gold plated contacts
- 4 AgSnO₂ contacts, weld resistant to capacitive loads
- Polarisation diode
- Double zener diode
- Coil for both AC and DC
- Double make / double break contacts
- No diode
- Keying (coding relay to connect socket)

Remark: Not all combinations possible

Dimensions (mm)




Weight

~ 140 g

Serializing

Each relay is marked with a unique serial number to which all important production information and test results are linked. The GTIN (Global Trade Item Number) and part number is printed on each relay in both text and data matrix code according the worldwide recognized GS1 standard, being able to scan each relay for logistical and traceability purposes.



Red or green LED coil indicator



Sockets

| | | Mounting | | | |
|---------------------|------------------------|----------------|------------|---------------|-----|
| | | Surface / Wall | 35 mm rail | Panel / Flush | PCB |
| Terminal connection | Screw | V23 | V23 | - | - |
| | Screw - wide terminals | V22 BR | V23 BR | - | - |
| | Spring clamp | V29 | V29 | V33 | - |
| | Faston | - | - | V31 | - |
| | Crimp | - | - | V26 | - |
| | Solder tag | - | - | V3 | - |
| | PCB | - | - | - | V32 |

For more information see the respective datasheets

For more detailed technical specifications, drawings and ordering information, go to the product page on www.morssmitt.com

 **Over 10 million Mors Smitt relays in use in rail transport applications worldwide!**

Mors Smitt Asia Ltd.
 26/F., Casey Aberdeen House
 38 Heung Yip Road, Wong Chuk Hang
 Hong Kong
 Tel: +852 2343 555
sales.msa@wabtec.com

Mors Smitt France SAS
 2 Rue de la Mandinière
 72300 Sablé-sur-Sarthe, France
 Tel: +33 (0) 243 92 82 00
sales.msf@wabtec.com

Mors Smitt UK
 Graycar Business Park,
 Burton on Trent, DE13 8EN, UK
 Tel: +44 (0)1283 357 263
sales.msuk@wabtec.com

Wabtec Netherlands B.V.
 Darwinstraat 10,
 6718 XR Ede, Netherlands
 Tel: +31 (0)88 600 4500
sales.msbv@wabtec.com

Mors Smitt Technologies Ltd.
 1010 Johnson Drive,
 Buffalo Grove, IL 60089-6918, USA
 Tel: +1 847 777 6497
salesmst@wabtec.com

RMS Mors Smitt
 19 Southern Court,
 Keysborough, VIC 3173, Australia
 Tel: +61 (0)3 8544 1200
sales.rms@wabtec.com

(c) Copyright 2022




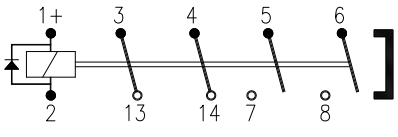





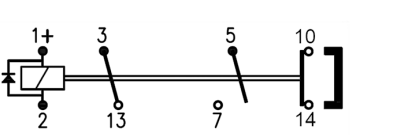

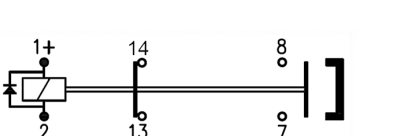
All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.

Instantaneous relay
D-U200N-W

Technical specifications

Connection diagram

Bottom view relay

| | | |
|---|---|--|
|  |  | D-U200N-W013 relay contact combination 1 N/C 3 N/O |
|  |  | D-U200N-W022 relay contact combination 2 N/C 2 N/O |
|  |  | D-U200N-W031 relay contact combination 3 N/C 1 N/O |
|  |  | D-U200N-W012Y relay contact combination 1 N/C 1 N/O 1 N/O double make |
|  |  | D-U200N-W021Y relay contact combination 1 N/C 1 N/O 1 N/C double break |
|  |  | D-U200N-W011Y relay contact combination 1 N/C double break 1 N/O double make |

No relay pins at the black marked pin positions.

Mechanical keying

At the black marked positions the holes in the socket are blocked, so no relay pin can enter.
Only correct contact configuration of the D-U200N-W0XX model will fit.

Top view socket

Example: for relay D-U204N-W013 code AV use socket V23 code AV013

Additional standard keying see page 11

Technical specifications

Instantaneous relay D-U200N-W

Coil characteristics

| | | |
|---|----------|------------------|
| Inductance L/R at Unom (typical value): | | |
| Energized | | 11 ms |
| Released | | 8 ms |
| Nominal power consumption | | 2.2 W @ Unom |
| Operating voltage range | EN 50155 | 0.7 - 1.25 Unom |
| DC power supply fluctuation range | EN 50155 | 0.6 - 1.4 Unom |
| Interruptions of power supply voltage | EN 50155 | Class S2 (10 ms) |

| Type | Unom (VDC) | Umin (VDC) | Umax (VDC) | Udrop-out (VDC) | Rcoil * (Ω) | Icoil-nom (mA) |
|-----------|------------|------------|------------|-----------------|-------------|----------------|
| D-U201N-W | 24 | 16.8 | 30 | 2.4 | 270 | 89 |
| D-U202N-W | 48 | 33.6 | 60 | 4.8 | 1046 | 46 |
| D-U203N-W | 72 | 50.4 | 90 | 7.2 | 2406 | 30 |
| D-U204N-W | 110 | 77 | 137.5 | 11 | 5330 | 21 |
| D-U205N-W | 96 | 67.2 | 120 | 9.6 | 4150 | 23 |
| D-U206N-W | 12 | 8.4 | 15 | 1.2 | 72 | 167 |
| D-U207N-W | 36 | 25.2 | 45 | 3.6 | 562 | 64 |
| D-U208N-W | 55 | 38.5 | 69 | 5.5 | 1300 | 42 |
| D-U210N-W | 120 | 84 | 150 | 12 | 6160 | 19 |
| D-U213N-W | 125 | 87.5 | 156.25 | 12.5 | 7634 | 16 |
| D-U215N-W | 220 | 154 | 275 | 22 | 21776 | 10 |
| D-U220N-W | 250 | 175 | 312.5 | 25 | 23850 | 10 |

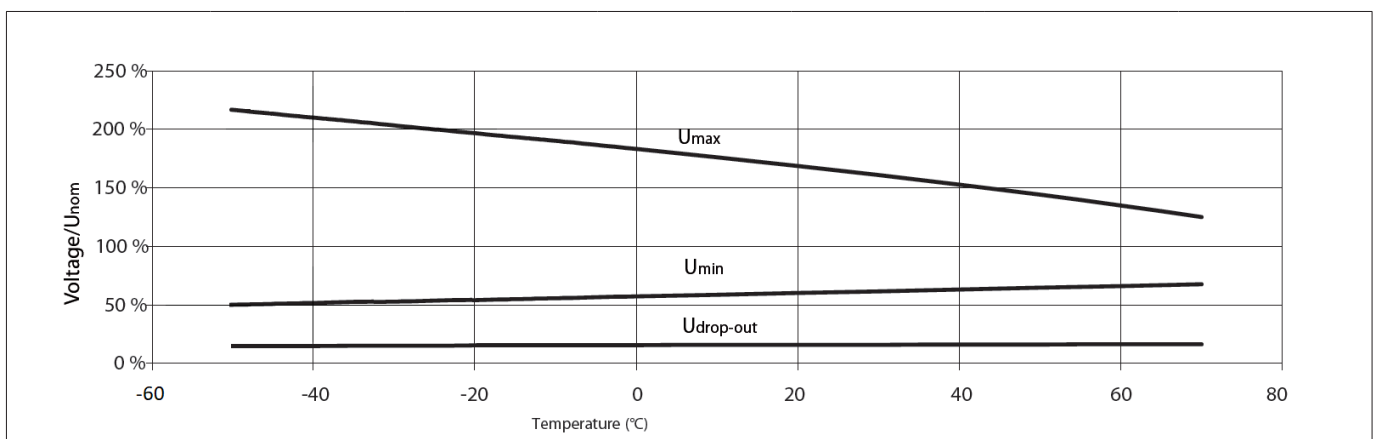
Other types on request

* The Rcoil is measured at room temperature and has a tolerance of $\pm 10\%$, with option L (LED) the value can differ

Remarks:

- Umin is the must-operate voltage at which the relay has picked up in all circumstances (worst-case situation), in practice the relay picks up at a lower voltage
- Udrop-out is the must-release voltage at which the relay has dropped-out in all circumstances (worst-case situation), in practice the relay drops out at a higher voltage
- Always select the nominal voltage as close as possible to the actual voltage in the application

Operating range at various temperatures




Instantaneous relay D-U200N-W

Contact characteristics

| | | |
|---|-------------|--|
| Contact configuration | | 4 N/O - N/C |
| Peak inrush current | NF F 62-002 | 200 A (withstand > 10 x 200 A @ 10 ms, 1 min) 80 A (withstand > 10 x 80 A @ 200 ms, 1 min) 40 A (withstand > 10 x 40 A @ 500 ms, 1 min) 30 A (withstand > 10 x 30 A @ 1000 ms, 1 min) |
| Continuous current | | 10 A |
| Maximum switching voltage | | 250 VDC, 440 VAC |
| Minimum switching voltage* | | 5 V |
| Minimum switching current* | | 1 mA |
| Maximum breaking capacity (> 50.000 operations) | | 110 VDC, 10 A (resistive load) 72 VDC, 5 A (L/R ≤ 40 ms) 110 VDC, 0.5 A (L/R ≤ 40 ms) |
| Contact resistance | | 15 mΩ (initial) |
| Material | | Ag standard (optional AgSnO ₂ , Au on Ag) |
| Contact gap | | ≥ 1.5 mm |
| Contact force | | > 200 mN |

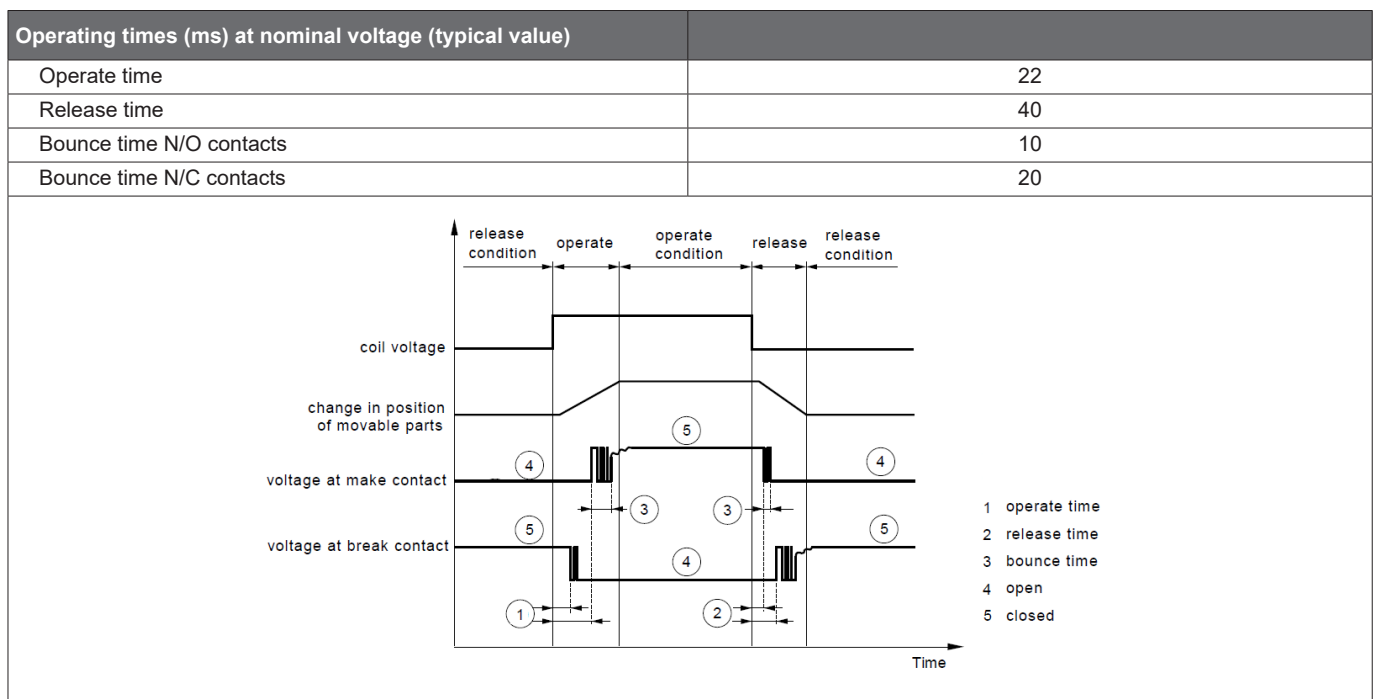* Standard silver contacts tested in lab conditions. We strongly advice to always use gold plated contacts when switching very low currents, as long time reliable operation depends also on switching frequency and environmental conditions. Take recommendations for long time reliability on page 12 into account.



Contact reliability according IEC 60947-5-4


| Contact switching load | Contact material | Failure rate λ_c^* | Mean number of operating cycles to contact failure m_c^* |
|-------------------------|-------------------|----------------------------|--|
| 1 mA, 5 VDC resistive | Gold (option E) | 5×10^8 | 20.000.000 |
| 5 mA, 24 VDC resistive | Gold (option E) | 4×10^8 | 25.000.000 |
| 10 mA, 50 VDC resistive | Silver (standard) | 2×10^8 | 50.000.000 |

*at confidence level 90%

Note: tested in factory environment at ambient temperature 20 °C. To underline the reliability of low current switching with the new D-U200N-W relay in parallel a 1 mA / 5 V test was done using standard silver contacts. The result was the same reliability. But since real train conditions are far different from Lab conditions we always recommend gold contacts for such low contact ratings.

Instantaneous relay D-U200N-W

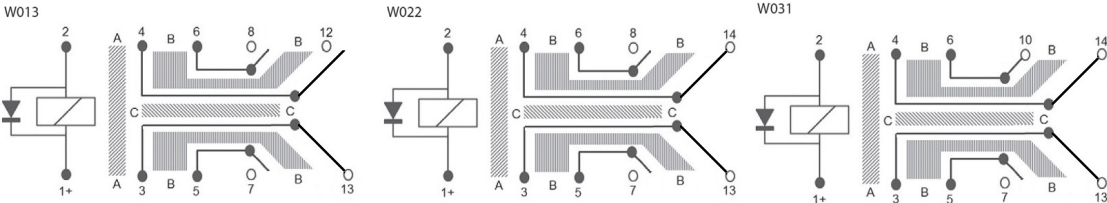Electrical characteristics

| Dielectric strength | Pole-pole Cont-coil Open contacts | 4 kV, 50 Hz, 1 min 2.5 kV, 50 Hz, 1 min 2.5 kV; 50 Hz; 1 min | | |
|--|---|--|----------------|---------|
| Clearance and creepage according IEC 60664-1 / EN 50124-2 | | | | |
|  | | | | |
| Section | Clearance | Creepage | Material group | Unom* |
| A | ≥ 2.2 mm | ≥ 3.0 mm | I (CTI600) | ≤ 220 V |
| B | ≥ 3.0 mm | ≥ 3.0 mm | I (CTI600) | ≤ 300 V |
| C | ≥ 6.1 mm | ≥ 6.1 mm | I (CTI600) | ≤ 696 V |
| *For basic insulation, PD2 and OV3 | | | | |
| Pulse withstanding | IEC 60255-5 | 5 kV (1.2/50 μs) | | |
| Insulation resistance | EN 50155 | > 20 MΩ (test voltage 500 VDC) | | |

Environmental characteristics

| | |
|---|--|
| Vibration | IEC 61373, Category I, Class B, Body mounted |
| Shock | IEC 61373, Category I, Class B, Body mounted |
| Operating temperature | -50 °C...+85 °C (+70 °C according EN 50155) |
| Operating temperature class | OT4 (tested with -50 °C instead of -40 °C) |
| Humidity | 98% |
| Maximum altitude | 2000 meter. Higher altitudes are possible but have consequences mentioned in IEC 60664 (for example 5000 meter with bigger clearance distance) |
| Salt mist | IEC 60068-2-11, class ST4 |
| Dry heat | IEC 60068-2-2 test Be |
| Damp heat | IEC 60068-2-30, Test method Db variant 1 |
| Protection | IEC 60529, IP40 (relay on socket) (with option K: IP50) |
| Fire & smoke | NF F 16-101, NF F 16-102, EN 45545-2: HL3 for requirements R22, R23, R26 |
| Insulation materials | Cover: polycarbonate Base: nylon |
| Natural cooling or forced ventilation constraints for the equipment | None: no extra measures necessary, relays can be mounted tightly together to save space |
| REACH: Registration, Evaluation, Authorisation and Restriction of Chemicals | European Regulation No 1907/2006 |

Instantaneous relay

D-U200N-W

RAMS features

| | |
|--|---|
| Life class | L4 (Useful life 20 years, take electrical life cycle curves into account) |
| Repairability | Non-repairable |
| Maintenance instructions | See inspection/maintenance on page 12 |
| Reliability / lifetime Mechanical lifetime Low energy electrical lifetime High energy electrical lifetime | > 50 million operations, maximum switching frequency 1 Hz (1 million operations at -50 °C) 5 million operations, maximum switching frequency 1 Hz See electrical life expectancy on page 9 |
| Storage precautions | Storage temperature: -50 °C ... +85 °C Store in original packaging |

Product labeling

| | |
|-------------------------------|--|
| Part number identification | Part number mentioned on top side relay |
| Serial number identification | Serial number mentioned on top side relay Serial number = Lot number + year + week + reference number |
| Data matrix code | According GS1 standard, placed on top side relay 01 Global Trade Item Number 240 Part number 21 Serial number Example: 011234567890123240123456789211234562209001 |
| Revision index identification | Linked to serial number |
| Terminals | Identification on bottom plate relay Relay to be used with Mors Smitt relay sockets which have clear terminal identification on each socket |

Railway compliancy

| | |
|---|--|
| EN 50155: 2017 | Railway applications - Rolling stock - Electronic equipment |
| IEC 60571: 2012 | Railway applications - Electronic equipment used on rolling stock |
| IEC 60077-1: 2017 | Railway applications - Electric equipment for rolling stock |
| IEC 60947-5-1: 2016 / IEC 60947-5-4: 2012 | Low-voltage switchgear and controlgear |
| IEC 61373: 2010 | Railway applications - Rolling stock equipment - Shock and vibration tests |
| EN 50121-3-2: 2016 | Railway applications - Electromagnetic compatibility |
| NF F16-101/102 | Railway rolling stock - Fire behavior |
| EN 45545-2: 2015 | Railway applications - Fire protection on railway vehicles Part 2: Requirements for fire behavior of materials and components |

Instantaneous relay D-U200N-W

Options

| Code | Description | Remark | Cannot be combined with: |
|------|-------------|--------|--------------------------|
|------|-------------|--------|--------------------------|

Standard options:

| | | | |
|--------|---|--|----------|
| E* | Au; Gold plated contacts (10 µm) | | M |
| K | Extra dust protection | IP50 Cat 2 for the relays mounted in a Mors Smitt socket. Application PD1/PD2 and contact load > 0.5 A. | |
| Lg** | Green LED integrated in coil | For 24/72/110 VDC. (Other voltages on request) | X, X2 |
| Lr** | Red LED integrated in coil | | X, X2 |
| Q | Double zener diode over coil | Unom ≤ 120 V. Maximum allowed peak voltage 180 V, higher voltage will damage the diode. Replaces back EMF diode. | X2, Z |
| Y | Double make/double break contacts, contact gap 3.0 mm | 6 different contact combinations, see page 3 | |
| Z | No diode | Polarity independent | P, Q, X2 |
| Keying | Coil coding relay and socket | | |

Special options:

| | | | |
|----|--|---|-------------------|
| M | AgSnO ₂ ; "non-weldable" contacts | Icontact > 100 mA | E |
| P | Polarisation diode | | X, X2, Z |
| X | Bipolar LED | Only in combination with Q or Z | Lr/Lg, P, X2 |
| X2 | AC/DC rectifier bridge | Replaces back EMF diode. Unom must be minimal 24 V. | Lr/Lg, P, Q, X, Z |

* Gold plated contacts characteristics

| | |
|---------------------------|---|
| Material | Ag, 10 µm gold plated |
| Maximum switching voltage | 60 V (higher voltages may be possible, contact Mors Smitt for more information) |
| Maximum switching current | 400 mA (at higher rate gold will evaporate, then the standard silver contact rating of minimum 10 mA and 12 V is valid) |
| Minimum switching voltage | 5 V |
| Minimum switching current | 1 mA |

** LED in series with coil: besides ON/OFF information also indicator when relay coil wire is broken, then LED always OFF. When LED is broken the relay still works correct.

Remark: For application support or technical product support, contact your local Mors Smitt sales office (see contact details on last page).



Instantaneous relay D-U200N-W

Electrical life expectancy

Due to the safety nature of the D-U200N-W relays, please contact Mors smitt with detailed contact load data. With this information, Mors Smitt can provide a correct advice in line with your specific application.

Required contact data:

- Voltage
- Current
- Inductance of load
- Kind of suppression used on load
- Required number of operations
- Switching frequency

Weld-no-transfer

The most obvious difference to standard relays is the so called forcibly guided contacts. The minimum requirement for such a relay is that it consists of at least one N/C contact and one N/O contact. The contacts are mechanically linked, so that N/O and N/C contacts can never be closed at the same time.

Weld-no-transfer (forcibly guided) contacts make it impossible to close the normally closed and normally open contact simultaneously. If a normally closed contact becomes welded, it is impossible for the normally open contacts to close when the coil is energized. If a normally open contact becomes welded, it is impossible for the normally closed contacts to close when the coil is de-energized.

If a contact welds, a guide (counter blades) stops movement of the contact block to ensure other contacts cannot close.

Weld-no-transfer relays are the connecting link between the load and monitoring circuits; they act as a monitoring element in electronics for functional safety.

Weld-no-contact feature is primarily required for safety circuits and redundant control systems. With a forcibly guided relay its welding state can be detected and allows determination by the control circuit if contacts are welded together.

When the N/O contact carries the load, a N/C contact can be used as monitoring contact. The monitoring contact will not close when the N/O contact is welded.

The D-U200N-Wxxx relay with weld-no-transfer contacts complies to the standards NF F62-002 (§12.3.10) and meets the technical requirements listed in the EN 50205 standard as described below.

Testing according to NF F62002 §12.3.10:

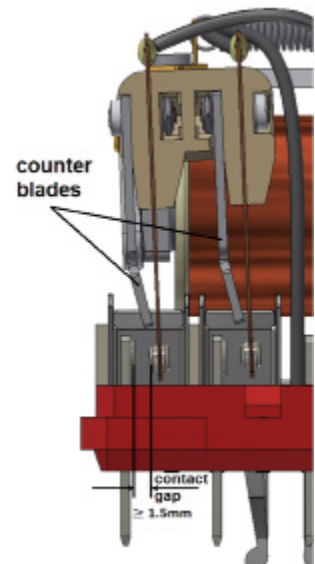
- With one N/C contact kept closed, none of the N/O contacts may close a test circuit of 10 mA @ 220 V 50 Hz when the coil is energized with 150 % of the maximum specified coil voltage ($= 150 \% * 125 \% U_{nom} = 188 \% U_{nom}$). The other N/C contacts may open.
- With one N/O contact kept closed, none of the N/C contacts may close a test circuit of 10 mA @ 220 V 50 Hz when the coil is de-energized. The other N/O contacts may open.

Testing according to EN 50205:

- If one N/C contact fails to open, all N/O contacts must maintain a contact gap ≥ 0.5 mm when the coil is energized with the maximum energizing quantity which can occur under worst case conditions:
 - maximum coil voltage
 - minimum ambient temperature
 - minimum coil resistance
- If one N/O contact fails to open, all N/C contacts must maintain a contact gap ≥ 0.5 mm when the coil is de-energized
- All tests must be performed under worst case conditions
- Above requirements apply throughout the specified endurance and under reasonable foreseeable single failure conditions
- Failure mode and effect analysis (FMEA) has been performed to verify the design

Safety related application condition

In case the relays are used in safety relevant application conditions the relays shall be used in applications where the contacts are read back within a two channel safety structure.



Instantaneous relay D-U200N-W

Mounting possibilities/sockets



Surface/wall mounting

| | | |
|-----------|-------|---|
| 338000302 | V22BR | Screw socket, wall mount, front connection (9 mm terminals) |
| 338000580 | V23 | Screw socket, wall mount, front connection (7.5 mm terminals) |
| 338000610 | V29 | Spring clamp socket, wall mount, front dual connection (2.5 mm ²) |

Rail mounting

| | | |
|-----------|-------|---|
| 338000580 | V23 | Screw socket, rail mount, front connection (7.5 mm terminals) |
| 338000402 | V23BR | Screw socket, rail mount, front connection (9 mm terminals) |
| 338000610 | V29 | Spring clamp socket, rail mount, front dual connection (2.5 mm ²) |

Panel/flush mounting

| | | |
|-----------|-----|---|
| 338100100 | V3 | Solder tag socket, panel mount, rear connection |
| 328400100 | V26 | Crimp contact socket, panel mount, rear connection, A260 crimp contact |
| 338000560 | V31 | Faston connection socket, rear dual connection (4.8 x 0.8 mm) |
| 338000670 | V33 | Push-in terminal socket, panel mount, rear dual connection (3.3 mm ²) |

PCB mounting


| | | |
|-----------|-----|----------------------|
| 338000561 | V32 | PCB soldering socket |
|-----------|-----|----------------------|

No external retaining clip needed as the 'snap-lock' will hold the relay into the socket under all circumstances and mounting directions (according shock & vibration requirements IEC 61373, Category I, Class B, Body mounted). If regulations require external retaining clips, these are available as well.

For more details see datasheets of the sockets on www.morssmitt.com

Instantaneous relay D-U200N-W

Mechanical keying relay and socket (optional)




Function:

- To prevent wrong installation
- To prevent damage to equipment
- To prevent unsafe situations

Using keyed relays and sockets prevents a relay is inserted in a wrong socket. For example it prevents that a 24 VDC relay is put in a 110 VDC circuit. Positive discrimination is possible per different function, coil voltage, timing, monitoring, safety and non-safety.

The D relay socket keying option gives $8 \times 8 = 64$ possibilities. Upon ordering the customer simply indicates the need for the optional keying. Mors Smitt will assign a code to the relay and fix the pins into the relay. The sockets are supplied with loose key receptacles. Inserting the keys into the socket is very simple and self explaining.

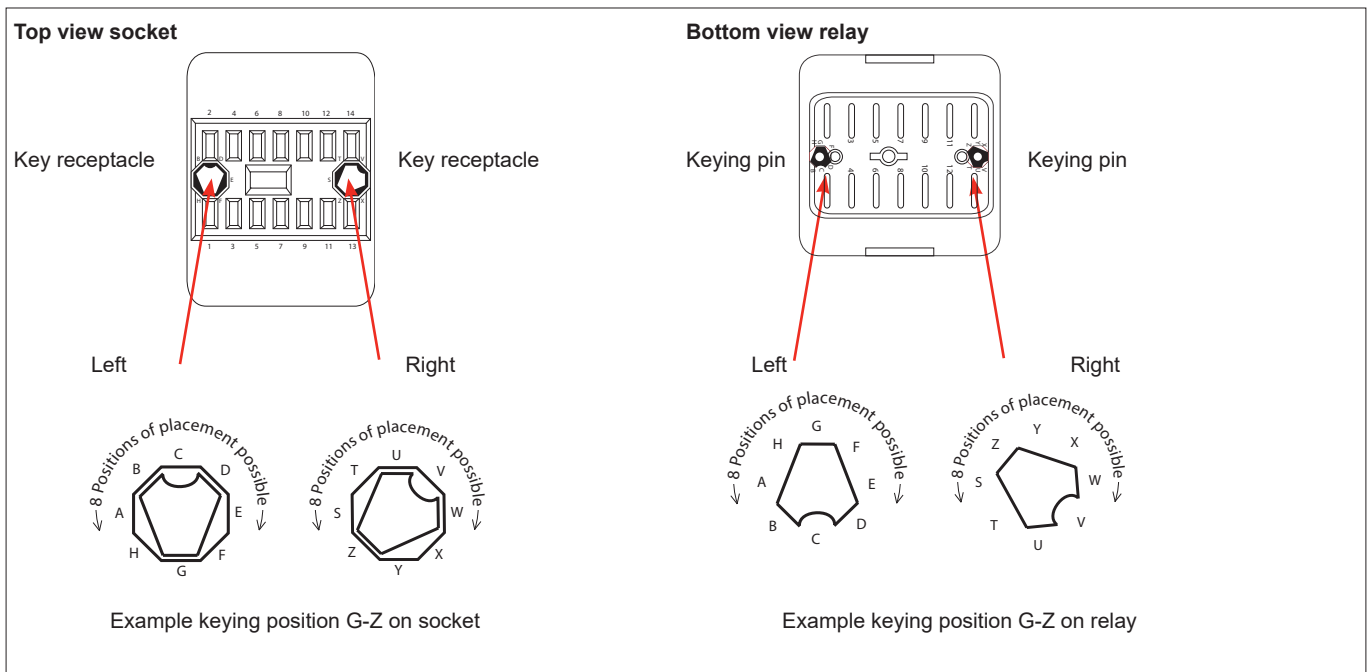Remark: Sockets and relay shown are examples.



Instantaneous relay D-U200N-W

Important for relay selection and operation

Make sure the relay is suitable for the application. For critical applications (for example: green loop applications) relays should be checked on correct working during periodic inspection.

Recommendations for long time contact reliability

For relays to enable failure free performance over a very long operational time, it is important to create the right circumstances. In any relay, contact usage and atmospheric conditions influence the contact surface. To counter this effect it is common practice to use a safety factor of > 2 to ensure long time contact reliability.

Therefore for long time contact reliability we recommend:

- Silver contacts: a minimum contact current of 20 mA per contact
- Gold contacts: a minimum contact current of 10 mA per contact
- Double Make Double Break contacts: a minimum contact current of 40 mA per contact
- When low currents are switched and not frequently, e.g. 10 mA once a day, it is advised (next to gold plated contacts) to put similar contacts within the same relay in parallel
- With higher load switching, e.g. 110 VDC and > 1 A, put relay contacts in series
- Rule of thumb: any relay works best with switching currents > 20 mA in DC environment when frequently switched. When not switched frequently a higher switching current like 50 mA is better for a long reliable operational time
- Check relays regularly, for example with the Mors Smitt Portable Relay Tester and visually through the transparent cover

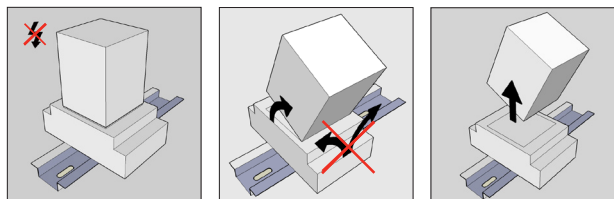
Instructions for use

Installation

Before installation or working on the relay: disconnect the power supply first (no hot swapping)! Install socket and connect wiring according to the terminal identification. Plug relay into the socket ensuring there is no gap between the bottom of relay and the socket. Reverse installation into the socket is not possible due to the mechanical blocking snap-lock feature. Check to ensure that the coil connection polarity is not reversed. Relays can be mounted tightly together to save space. When rail mounting is used, always mount the socket in the direction of the UP arrow, to have proper fixation of the socket on the rail.

Warning!

- Never use silicon in the proximity of the relays
- Do not use the relay in the presense of flammable gas as the arc generated from switching could cause ignition
- To remove relays from the socket, employ up and down lever movements. Sideway movement may cause damage to the coil wires



- Relays should never be swapped to other circuit positions when taken out of its socket for inspection or fault finding, always place it back into the original position to prevent contact resistance problems. Contact resistance problems can be created when swapping relays between different circuit loads due the contact wear/condition having changed during its operational life.

Operation

After installation always apply the rated voltage to the coil to check correct operation. Long term storage may corrode the silver on the relay pins. When plugging the relay into the socket, the female bifurcated or trifurcated receivers will automatically cut through the corrosion on the pins and guarantee a reliable connection.

Before actual use of relays, it is advised to switch the load several times with the contacts. The contacts will both be electrically and mechanically cleaned due to the positive wiping action. Sometimes a contact can build up increased contact resistance (≤ 15 m Ω when new). When using silver contacts one can clean the contact by switching a contact load a few times using >24 VDC & ~ 2 A. Increased contact resistance is not always problematic, as it depends on circuit conditions. In general a contact resistance of 1 Ω is no problem, consult Mors Smitt for more information.

Condensation in the relay is possible when the coil is energised (warm) and the outside, environmental temperature is cold. This is a normal phenomenon and will not affect the function of the relay. Materials in the relay have no hygroscopic properties.

Instantaneous relay **D-U200N-W**

Inspection / maintenance

Correct operation of the relay can easily be checked as the transparent cover provides good visibility of the moving contacts. If the relay does not seem to operate correctly, check for presence of the appropriate coil voltage and polarity using a suitable multimeter. If a LED is fitted, it indicates voltage presence to the coil. If coil voltage is present, but the relay does not operate, a short circuit of the suppression diode is possible (likely caused by reversed coil connection).

Relays can easily be tested with the Mors Smitt Relay Tester. More information on: www.morssmitt.com.

If the relay doesn't work after inspection, replace the relay unit with a similar model. Do not attempt to open the relay cover or try to repair. Contacts are calibrated and in balance, touching can affect proper operation. Also resoldering may affect correct operation. Since 2009 relays have tamper proof seals fitted and once broken, warranty is void.

Most relay defects are caused by installation faults such as overvoltage, spikes/transients, high/short current far exceeding the relay specifications. When returning the relays for investigation, please provide all information on the RMA form. Send defective relays back to the manufacturer for repair or replacement. Normal wear and tear or external causes are excluded from warranty.

RMA procedure see www.morssmitt.com

Instantaneous relay D-U200N-W

Ordering scheme

| D-U2 | N - | | | Code | | |
|--|-----|--|-------|--|--|-------------------|
| Coil voltages | 01 | | | | 24 VDC | |
| | 02 | | | | 48 VDC | |
| | 03 | | | | 72 VDC | |
| | 04 | | | | 110 VDC | |
| | 05 | | | | 96 VDC | |
| | 06 | | | | 12 VDC | |
| | 07 | | | | 36 VDC | |
| | 08 | | | | 55 VDC | |
| | 10 | | | | 120 VDC | |
| | 13 | | | | 125 VDC | |
| | 15 | | | | 220 VDC | |
| | 20 | | | | 250 VDC | |
| Options (add as many options as needed, always in alphabetical order) | E | | | | Gold plated contacts | M |
| | K | | | | Extra dust protection, IP50 | |
| | Lg | | | | Green LED coil indicator | X, X2 |
| | Lr | | | | Red LED coil indicator | X, X2 |
| | Q | | | | Double zener diode | X2, Z |
| | Y | | | | Double make/ double break | |
| Special options (minimum order quantity: 20) | Z | | | | No diode | P, Q, X2 |
| | M | | | | AgSnO ₂ contacts, highly resistant to welding | E |
| | P | | | | Polarisation diode | X, X2, Z |
| | X | | | | Bipolar LED | Lg/Lr, P, X2 |
| | X2 | | | | Coil for both DC and AC | Lg/Lr, P, Q, X, Z |
| Contact information | | | W013 | | Weld-no-transfer, 1 N/C - 3 N/O | |
| | | | W022 | | Weld-no-transfer, 2 N/C - 2 N/O | |
| | | | W031 | | Weld-no-transfer, 3 N/C - 1 N/O | |
| | | | W012Y | | Weld-no-transfer, 1 N/C - 1 N/O - 1 N/O double make | |
| | | | W021Y | | Weld-no-transfer, 1 N/C - 1 N/O - 1 N/C double break | |
| | | | W011Y | | Weld-no-transfer, 1 N/C double break - 1 N/O double make | |
| Keying code (optional, leave blank if not required) | | | | Standard, silver contacts | | |
| | | | AS | | 24 VDC | |
| | | | AY | | 36 VDC | |
| | | | AT | | 48 VDC | |
| | | | AU | | 72 VDC | |
| | | | AV | | 110 VDC | |
| | | | | Option E, gold contacts | | |
| | | | DT | | 24 VDC | |
| | | | FV | | 36 VDC | |
| | | | HU | | 48 VDC | |
| | | | AZ | | 72 VDC | |
| | | | HV | | 110 VDC | |
| | | | | Option M, silver tin oxide contacts | | |
| | | | GT | | 24 VDC | |
| | | | HT | | 36 VDC | |
| | | | GU | | 48 VDC | |
| | | | GV | | 72 VDC | |
| | | | GW | | 110 VDC | |

Remark: keying codes are available for all possible coil voltages.

Instantaneous relay **D-U200N-W**

Ordering scheme - examples

Options always in alphabetical order.

Examples:

D-U204N-LgW013 code AV

Description: D-U200N-W relay, Unom 110 VDC, green LED coil indicator, weld-no-transfer 1 N/C - 3 N/O contacts, keying code AV

D-U201N-EKLRW022

Description: D-U200N-W relay, Unom 24 VDC, gold plated contacts, extra dust protection, red LED coil indicator, weld-no-transfer 2 N/C - 2 N/O contacts

 **Over 10 million Mors Smitt relays in use in rail transport applications worldwide!**

Mors Smitt Asia Ltd.
26/F, Casey Aberdeen House
38 Heung Yip Road, Wong Chuk Hang
Hong Kong
Tel: +852 2343 555
sales.msa@wabtec.com

Mors Smitt France SAS
2 Rue de la Mandinière
72300 Sablé-sur-Sarthe, France
Tel: +33 (0) 243 92 82 00
sales.msf@wabtec.com

Mors Smitt UK
Graycar Business Park,
Burton on Trent, DE13 8EN, UK
Tel: +44 (0)1283 357 263
sales.msuk@wabtec.com

Wabtec Netherlands B.V.
Darwinstraat 10,
6718 XR Ede, Netherlands
Tel: +31 (0)88 600 4500
sales.msbv@wabtec.com

Mors Smitt Technologies Ltd.
1010 Johnson Drive,
Buffalo Grove, IL 60089-6918, USA
Tel: +1 847 777 6497
salesmst@wabtec.com

RMS Mors Smitt
19 Southern Court,
Keysborough, VIC 3173, Australia
Tel: +61 (0)3 8544 1200
sales.rms@wabtec.com

(c) Copyright 2022

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.