

Sockets

D relays

V2 & V21

Compact surface / wall and 35 mm rail Screw terminals


Standards

EN 60255
EN 60947
EN 60947-5-1
IEC 61810




The V2 & V21 compact relay socket has one screw terminal per relay contact suitable for two wires up to 2.5 mm²

Connection diagram

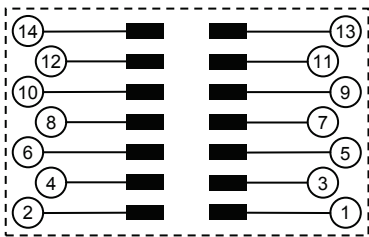

Dimensions

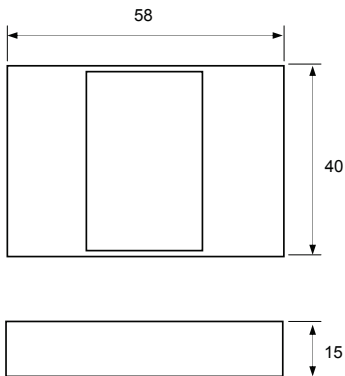

Features

- Screw terminals
- Rail mounting 35 mm (V21)
- Touch proof IP20
- Suitable for all D series relays
- Up to 2.5 mm² wire per connection terminal
- Bifurcated

Benefits

- Compact design, space saving
- Proven reliable
- Long term availability
- Easy to maintain
- Low life cycle cost
- No maintenance

Specifications

Contact rating	10 A (AC1) IEC 60947
Protecting category	IP20, IEC 60529
Mounting	35 mm rail mounting (V21)
Max. ambient temperature	80 °C
Weight	V2 = 48 g, V21 = 70 g
Dimensions	58 x 40 x 15.2 mm
Wire diameter	2.5 mm ² maximum
Material	Polyamide 66 / 6% glass
Socket contacts	Screw

Ordercodes

V2	Surface mounting socket	338000100
V21	Rail mounting socket	338000200