


Sockets

KDN & D8

V9 & V91

Compact surface / wall and 35 mm rail Screw terminals

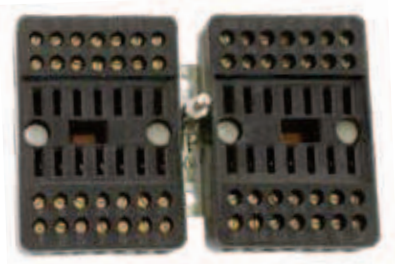


The V9 & V91 compact relay socket has one screw terminal per relay contact suitable for two wires up to 2.5 mm².


Standards

EN 60255
EN 60947
EN 60947-5-1
IEC 61810

Connection diagram

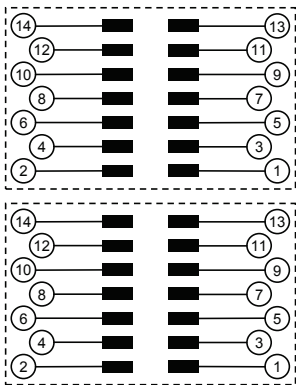

Dimensions

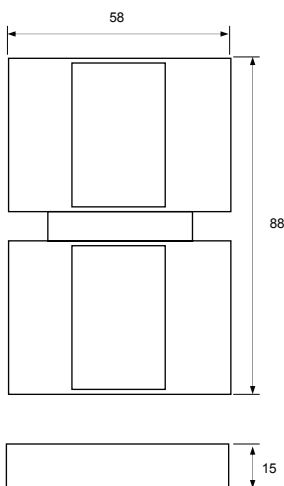

Ordercodes

V9 Surface KDN & D8 socket 338000900
V91 Rail KDN & D8 socket 338001900

Features

- Screw terminals
- Surface/wall mounting (V9)
- Rail mounting 35 mm rail (V91)
- Touch proof IP20
- Up to 2.5 mm² wire per connection terminal
- Bifurcated female receiver for tight grip relay pin

Benefits

- Compact design, space saving
- Proven reliable
- Long term availability
- Easy to maintain
- Low life cycle cost
- No maintenance

Specifications

Suitable for	All KDN & D8 relays
Contact rating	10 A (AC1) IEC 60947
Protecting category	IP20, IEC 60529
Mounting	Surface/wall mounting
Max. ambient temperature	80 °C
Weight	V9 = 168 g, V91 = 212 g
Dimensions	87 x 40 x 40 mm
Wire diameter	2.5 mm ² maximum
Material	Polyamide 66 / 30% glass
Socket contacts	Screw terminal